




Equipment sheet Pinerolo

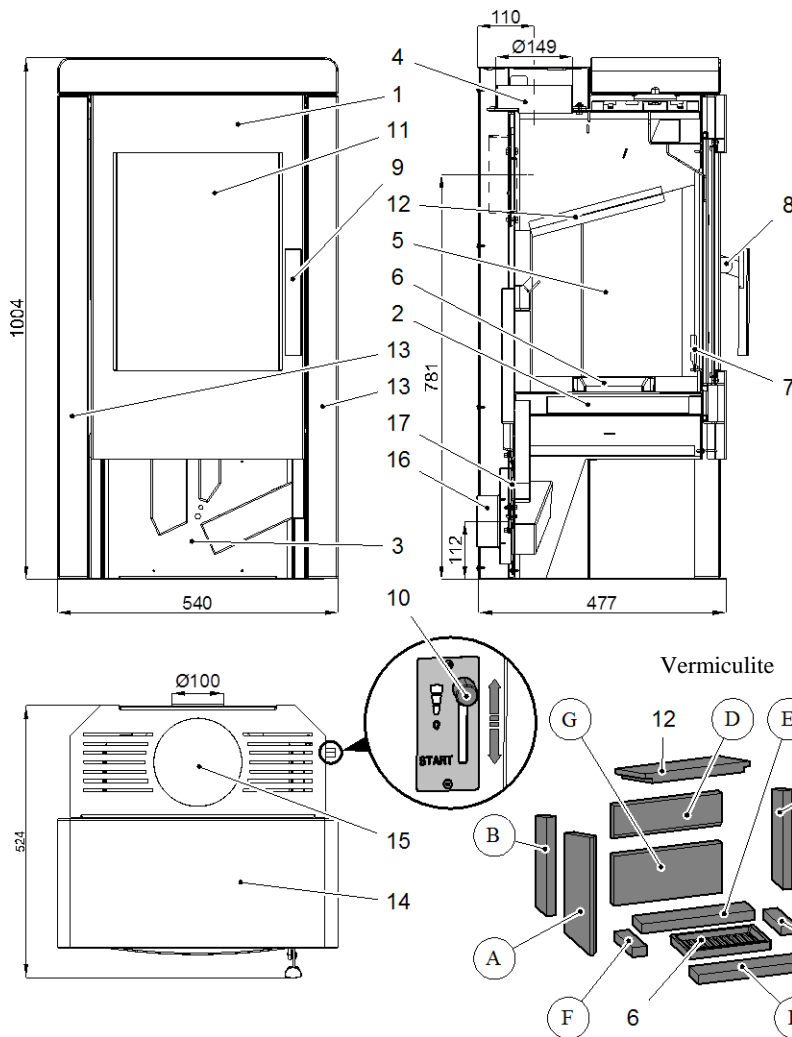

Suitable fuels:

As concerns suitable fuel to be employed, see the chapter **2.2 Fuel** in the General Manual of Operation.

Proper operation:

As concerns the proper and safe operation of the fireplace stove, see the chapters **2. Description of the combustion process** and **5. Operating instructions** in the General Manual of Operation.

| Item. no. | Stone Nr. | Dimension |
|---------------|-----------|------------|
| 0429415005501 | A | 30x220x370 |
| 0429415005502 | B | 30x80x307 |
| 0429415005503 | C | 30x220x370 |
| 0429415005504 | D | 30x105x340 |
| 0429415005505 | E | 30x80x355 |
| 0429415005506 | F | 30x45x155 |
| 0429415005507 | G | 30x155x340 |

| Fuels | Maximum fuel quantity | Air damper (10) heating up | Air damper (10) closed | Air damper (10) heating |
|-----------|-------------------------------|-----------------------------|------------------------|-------------------------|
| Wood logs | 2 logs (approx. 1,5 – 2,0 kg) | Position below (10 minutes) | Position middle | Position above |

| Spare parts no. | Item | Designation | Spare parts no. | Item | Designation |
|-----------------|------|-------------------------------------|-----------------|------|----------------------------------|
| 0429515055300 | 1 | Fire chamber door - black | 0429415500010 | 13 | Side parts – Woodstone Prestige |
| 0429415005030 | 2 | Ash pan | 0429415510010 | 13 | Side parts – Speckstein |
| - | 3 | Wood storage compartment | 0429415500020 | 14 | Cover plate – Woodstone Prestige |
| 0434215005049 | 4 | Smoke pipe spigot | 0429415510020 | 14 | Cover plate – Speckstein |
| - | 5 | Refractory | 0331415005060 | 15 | Insert plate - black |
| 0429415005005 | 6 | Grating 260x152x28 | 0088500050008 | 16 | Outside air - pipe fitting Ø100 |
| 0429415005036 | 7 | Upright grating 70x280 - black | 0429515055645 | 17 | Air control unit |
| 0429515055318 | 8+9 | Fire chamber + mounting door handle | | | |
| 0420915005625 | 10 | Easycontrol – Regulator knob | | | |
| 0429515055306 | 11 | Glass pane 438x320 | 0040300110005 | - | Seal door 11mm |
| 0429415005703 | 12 | Draft deflection plate 30x264x330 | 0040210040005 | - | Seal glass 10x4mm |

| Technical data: | | Pinerolo | |
|--|------------|---|---------|
| Height | 1004 mm | Flue gas temperature on the spigot of the heat generator | 300°C |
| Width | 540 mm | Minimum delivery pressure | 12 Pa |
| Depth without handles | 477 mm | Minimum delivery pressure with 0.8 times rated thermal capacity | 10 Pa |
| Weight | 179/197 kg | Flue mass flow | 5,4 g/s |
| Pipe spigot | 150 mm | Fuel | Wood |
| Rated heating capacity | 6 kW | CO ₂ | 0,07% |
| Thermal output range | 3,0-6,4 kW | Energy efficiency | 81,5% |
| Inspection no. EN 13240 RRF-40 13 3244 | | | |